




**Textile House**  
TRANSFORMING VISIONS INTO EXCELLENCE

# CAPRIANA

## VEGAN LEATHER

- Fade Resistant
- Bleach & Isopropyl Cleanable
- Stain Resistant
- Vibrant Palette
- Bacterial Resistant
- Easy Maintenance
- Oil & Urine Resistant
- Versatile Applications
- Long-lasting Performance
- 5 Year Warranty

OVER  
**35 COLOURS & 3 TEXTURES**

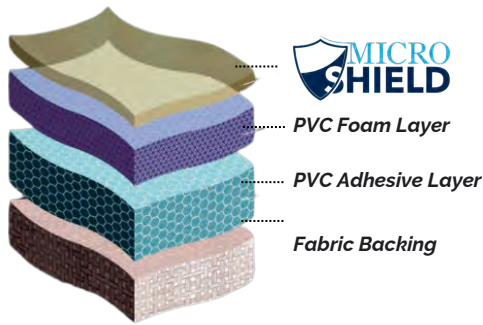

### MicroShield

This shield enables the vinyl material to be effectively cleaned using a solution composed of 5% to 10% alcohol or bleach diluted with water. Moreover, vinyl coated with Microshield technology satisfies the necessary standards for Antibacterial, Antimicrobial, and Oil Resistance properties.

### UV Resistance

Benefit from a comprehensive 5-year UV resistance warranty, an essential feature for outdoor fabrics subjected to extended periods of direct sunlight.

Capriana comes equipped with superior UV resistance, effectively thwarting fading, cracking, and other sun-induced damages. This exceptional durability ensures that Capriana stands as the optimal choice for FF & E, promising long-lasting performance even in the face of relentless sunlight exposure.

### Industry Specs

**Flame Resistant Standard**  
Standard 14 CFR Part 25 Appendix F Part 1 (a)(1)(v)

**50,000 rubs on Wyzenbeek Cotton Duck #10**

- Suitable for:
- Healthcare
  - Hospitality
  - Commercial Areas
  - Retail Spaces
  - Marine
  - Gymnasiums
  - Schools
  - Small Aircraft


# Capriana




Midnight  
NCH517



Tempest Black  
NCL702



Jet Black  
NCF652



Lagoon  
NCH553




Deep Water  
NCF616




Ocean Night  
NCF615




Quartz  
NCF650



Coastal Fog  
NCL704



Grey  
NCF801



Sea Mist  
NCF511



Super White  
NCH500



Ultra White  
NCF804



Snow Storm  
NCF802



Canvas  
NCF607



Barrier Island  
NCL703




Yamaha Stone  
Beige  
NCF657




Ez-Go Stone Beige  
NCF658




Clam Shell  
NCH544



Mahogany  
NCH542



Burgundy  
NCH521



Red Devil  
NCH519




Red Sea  
NCL700




Signal Blue  
NCH527




Royal Blue  
NCF625



Admiral Blue  
NCH524



Commodore Blue  
NCF626



Holly Leaf  
NCF631



Ocean Blue  
NCF629



Lime  
NCH533




Bright Sun  
NCF638




Orange Glow  
NCH541



Orange Peel  
NCF640



Plum  
NCF637



Blush Purple  
NCH536



Aurora Lights  
NCF654



Corsair Gold  
NCF653

## Properties

|   |  |
|---|--|
| <b>Face Composition</b>                     | PVC  |
| <b>Backing Composition</b>                  | Woven Polyester  |
| <b>Attributes</b>                           | Microshield  |
| <b>Product Type</b>                         | Heavy Commercial   |
| <b>Roll Size (approx)</b>                   | 27.5m  |
| <b>Styles</b>                               | Flat, Hide, Long Grain   |
| <b>Stain Repellent</b>                      | No   |
| <b>Bleach &amp; Isopropyl Cleanable</b>     | Yes  |
| <b>Usage</b>                                | Healthcare, Marine, Aged care, Hospitality, Commercial, General Upholstery     |
| <b>Warranty</b>                             | 5 Years in accordance with our product type and care instructions              |
| <b>Test Results</b>                         |  |
| <b>Weight (ASTM D 751 79)</b>               | 30 oz/lin yd   |
| <b>Width (CFFA-700a)</b>                    | 54 in. [137 cm]  |
| <b>Thickness</b>                            | 0.9mm  |
| <b>Flamibility</b>                          | Cal Tech 117 Section 3<br>FMVSS 302<br>CFR Part 25 Appendix F Part 1 (a)(1)(v) |
| <b>Protective Finish</b>                    | MicroSheild  |
| <b>Use</b>                                  | Outdoor/Indoor   |
| <b>Tear Strength (ASTM D 751)</b>           | 6 Warp, 6 Fill (lbs)   |
| <b>Tensile Strength (ASTM D 751)</b>        | 80 Warp, 90 Fill (lbs)   |
| <b>Wyzenbeek Abrasion (#10 Cotton Duck)</b> | 50,000 (double rubs)   |
| <b>Trap Tear Strength #,min (CFFA-16c)</b>  | 38 Warp, 38 Fill   |
| <b>Cold Crack (ASTM D 191A-5874)</b>        | -10 °F [-23 °C]  |
| <b>QUV-B 500 Hours</b>                      | Pass   |
| <b>Oil/Sulfide Resistance</b>               | Pass   |
| <b>Fungal Resistance (ASTM-G-21)</b>        | Pass (including ASTM E1428) (Pink Stain)                                       |
| <b>Bacterial Resistance</b>                 | Pass   |
| <b>Weatherometer</b>                        | 1500 Hours   |